

产品简介

XVR系列旋转声光报警器可以用于在远距离上提供声光信号，主要适用于钢铁工业、工业运输车辆以及安全保护应用。

特性

环境特性			
产品认证		UL, CE & CSA	
符合标准		EN 61000-6-2, EN 61000-6-4	
防护处理		"TC"	
环境温度	贮存	°C	-35...+70
	工作	°C	-10...+50 -30...+50 (XVR 13)
抗电冲击能力		Class II	
防护等级		XVR 08: IP 23 (使用附件可达IP65) XVR 10: IP 23 (使用附件可达IP55) XVR 12: IP 23 XVR 13: IP 66 (抗振动)	
材料	罩盖		PC
	本体		ABS
发光部件		超亮LED	
电气特性			
		12 V	24 V
电压范围	V	AC: 10.8 ... 13.2 DC: 10 ... 15	AC: 21.6 ... 26.4 DC: 19 ... 30
额定冲击耐压	kV	0.8	
电流损耗	常亮 XVR 08, XVR 10, XVR 12, XVR 13	mA	360
	XVR 12, 带蜂鸣器	mA	400
			180
			230
声音信号单元	声音音量(持续或断续)	dB	50...90
发光信号单元的闪光频率		Hz	2.3
接线		电缆: 0.83mm ² / AWG 18	

信号与指示灯组

XVR系列旋转声光报警器(包含LED)



XVR 08●●●●



XVR 10●●●●



XVR 12●●●●



XVR 13●●●●



XVRZ081



XVRZ082

完整型号的旋转声光报警器，预接电缆


直径 mm	声音选择	防护等级	电压 V	颜色	型号	重量 kg				
Ø 84	不带蜂鸣器	IP 23 (使用附件可达IP 65)	~ 12	红	XVR 08J04	0.300				
				橙	XVR 08J05	0.300				
				绿	XVR 08J03	0.300				
				蓝	XVR 08J06	0.300				
				~ 24	红	XVR 08B04	0.300			
					橙	XVR 08B05	0.300			
			绿		XVR 08B03	0.300				
			蓝		XVR 08B06	0.300				
			Ø 106		不带蜂鸣器	IP 23 (使用附件可达IP 55)	~ 12	红	XVR 10J04	0.500
								橙	XVR 10J05	0.500
				绿				XVR 10J03	0.500	
				蓝				XVR 10J06	0.500	
~ 24	红	XVR 10B04		0.500						
	橙	XVR 10B05		0.500						
	绿	XVR 10B03		0.500						
	蓝	XVR 10B06		0.500						
	Ø 120	不带蜂鸣器		IP 23			~ 12	红	XVR 12J04	0.500
								橙	XVR 12J05	0.500
绿								XVR 12J03	0.500	
蓝								XVR 12J06	0.500	
~ 24			红		XVR 12B04	0.500				
			橙		XVR 12B05	0.500				
			绿		XVR 12B03	0.500				
			蓝		XVR 12B06	0.500				
			Ø 120		带蜂鸣器	IP 23	~ 12	红	XVR 12J04S	0.500
								橙	XVR 12J05S	0.500
绿								XVR 12J03S	0.500	
蓝								XVR 12J06S	0.500	
~ 24	红	XVR 12B04S		0.500						
	橙	XVR 12B05S		0.500						
	绿	XVR 12B03S		0.500						
	蓝	XVR 12B06S		0.500						
	Ø 130	不带蜂鸣器		IP 66抗振动			~ 12	红	XVR 13J04	0.800
								橙	XVR 13J05	0.800
~ 24							红	XVR 13B04	0.800	
							橙	XVR 13B05	0.800	

附件


描述	直径 mm	高度	型号	重量 kg
反射棱镜	84	-	XVR ZR1	-
	106	-	XVR ZR2	-
	120/130	-	XVR ZR3	-
橡胶底座 (用于提高防护等级)	84	-	XVR Z081	-
	106	-	XVR Z082	-
金属支架 (用于垂直表面的安装)	84,106,120	-	XVC Z23	0.380
带铝延长管的金属固定底座 (用于水平表面的安装)	106,120	300	XVC Z13	0.700

完整型号的旋转声光报警器，预接电缆


XVR 08●0●

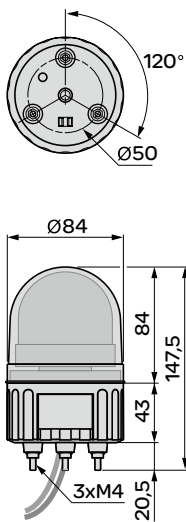


XVR Z081 (橡胶底座-可选件)

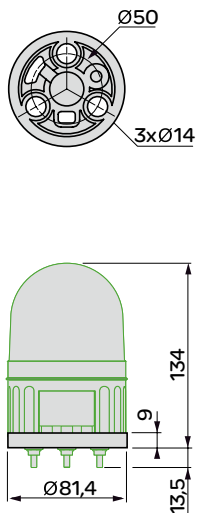


XVR 10●0●

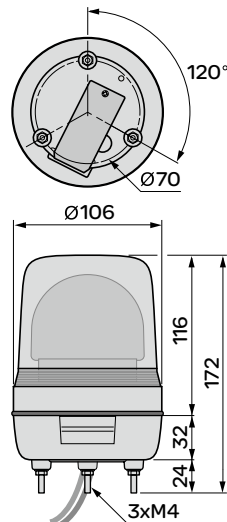


XVR Z082 (橡胶底座-可选件)

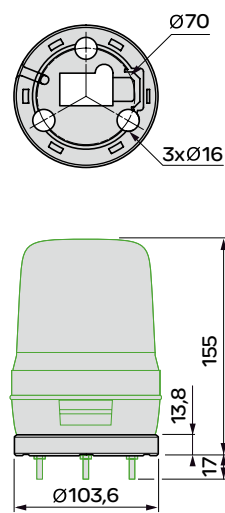


面板开孔




面板开孔

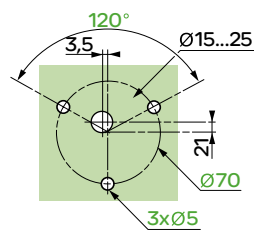


XVR 12●0●

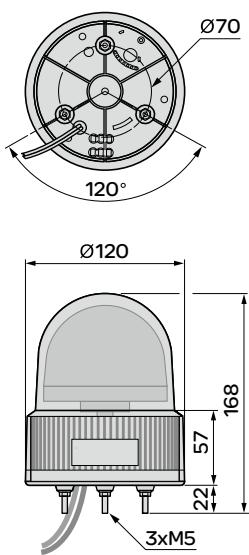


XVR 12●0●S

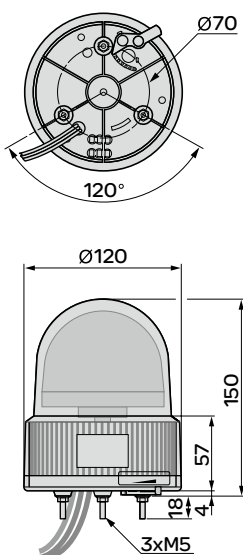


XVR 13●0●

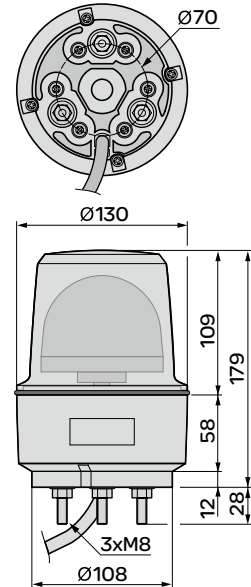

面板开孔



面板开孔



面板开孔

